

DLOBML DEDOLIGHT ON BOARD MINI LED

A SINGLE, HIGH-POWER LED

- **Amazing output** in combination with the Dedolight double aspheric optics.
- **Focuses** like a Dedolight. LED lights are not usually focusable.
- No other focusing LED light compares - 4° to 56°.
- **Smooth** light distribution in all and every focusing position.
- Wide angle flip-up diffuser for 70° angle, smoothly covering the widest zoom and widening the beam more horizontally than vertically (1:1.66).




After all, we don't shoot round pictures...

- Clean, sharp, single-edge barn door shadow OR a very gentle light and shadow transition with the flip-up wide angle diffuser in place
- Converts from daylight to tungsten via a dichroic flip-down filter
- Color rendition and color distribution is cleaner than comparable LED lights.



• Adjustable support arm allows it to be positioned above and forward.

• Dims extremely smoothly from full blast all the way down to zero without any color change.


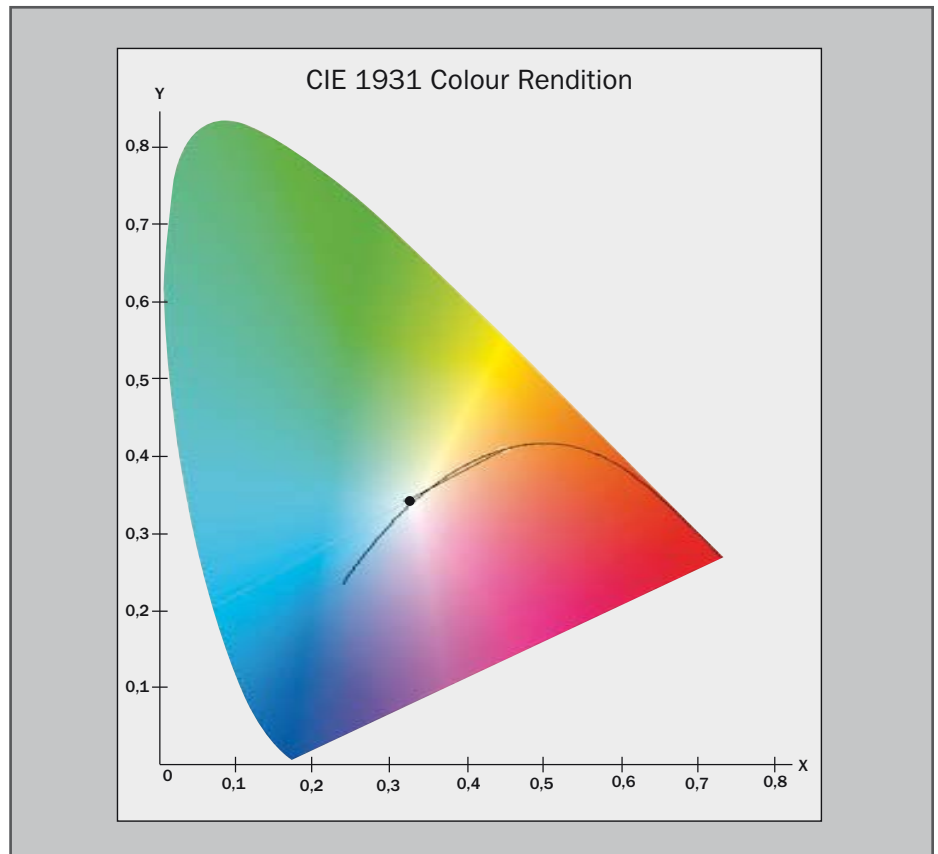




- Powers from any 6V to 18V DC power source.
- Optional battery shoe is compatible with Sony and Panasonic mini-DV batteries.
- NP-F550 7.2 V, 2000 mA, 105 minute run time.
- NP-F750 7.2 V, 4000 mA, 210 minute run time.
- NP-F950 7.2 V, 6000 mA, 330 minute run time.

When dimmed to 50% light output, power consumption drops accordingly resulting in twice the run time. Alternative power from any Anton/Bauer or PAG system, car cigarette lighter output or battery belt.

- Power consumption is only 8W despite its high output.
- Operates from -40°C up to +40°C.
- LED power available indicator.
- Frontend bayonet allows you to add future attachments and light modifiers.

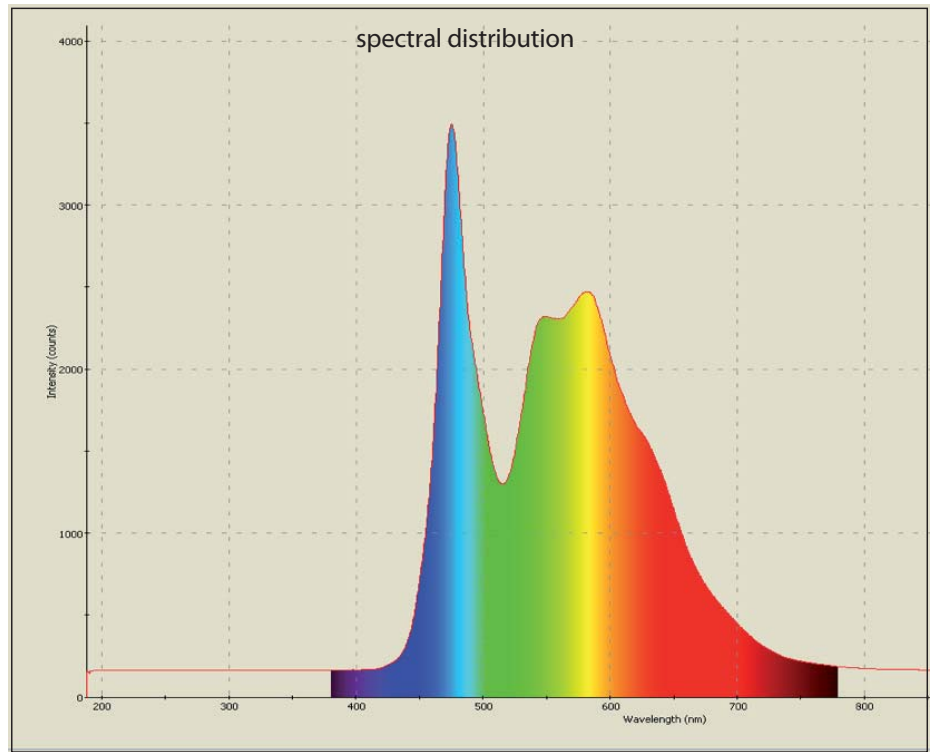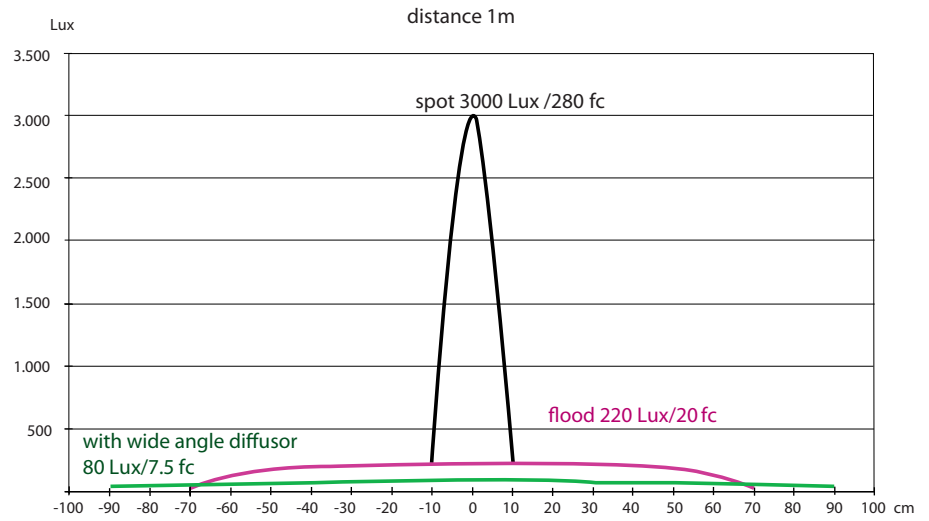

VISUAL DEPARTURES, LTD.

2001 West Main Street, Suite 195

Stamford, CT 06902

Phone: (800) 628-2003 Fax: (203) 487-0789

www.visualdepartures.com

DLGA200
Articulating arm,
200 mm. Square top
male shoe or 1/4"
male to camera.



DLOBML-BS
Battery shoe for
Sony NP-F battery.
Fits DLOBML.



DLOBML-XLR
0,65-1,30 m (25"-51")
coiled cable with 4-pin
XLR-male connector.



DLBSA-S
Female shoe to
1/4" male.



DLB-NPF550
7.2 Li-Ion battery,
14.8 Wh (2000 mAh).



DLOBML-SWIT
0,55 m (22") cable,
Ø 2,1/5,5 mm
(Ø 0.080"/0.218")
plug for Swit battery.



DLBSA-T
Female shoe to
1/4" female.



DLB-NPF950
7.2 Li-Ion battery
43.2 Wh (6000 mAh).



DLOBML-PAG
0,55 m (22") cable,
Ø 2,1/5,5 mm
(Ø 0.080"/0.218")
plug for PAG connector.



DLBSA-M
1/4" male to mini
shoe for Sony mini
camcorder
(use with DLBSA-T).



DLCH-NPF
Charger for NP-F
batteries
100-240 VAC.



DLOBML-CAR
cable 1,8 m (6 ft)
with connector for
car cigarette lighter



DLBSA-U
Square top fits
DLOBML, goes to
female shoe.



DLPS-12
12 V power from
100-240 VAC.



DLBSA-HAND
female shoe
with handle



DLBSA-3S
Triple shoe
with tilt lock.



DLOBML-P
Soft pouch
for DLOBML.



DLBRS
rail with 1/4"
scre w for camera
shoe for Ledzilla




DLA-ML
Square top fits
DLOBML, accepts
16 mm baby stud
(5/8").



DLOBML-AB-S
0,22 m (8.6") cable with
Anton/Bauer connector.



DLBRHS
rail with 1/4" screw
for camera and handgrip
(can be folded flat) with
shoe for Ledzilla



DLBF-8AA
External battery
holder for 8 AA
batteries.



DLOBML-AB-L
0,55 m (22") cable with Anton/Bauer
connector.



DV3GA
suction mount Ø 7,5 cm
(3") with vacuum pump
and articulating arm

